



Oil Resistant Over Braided Flexible Rubber Conduit (WNS)

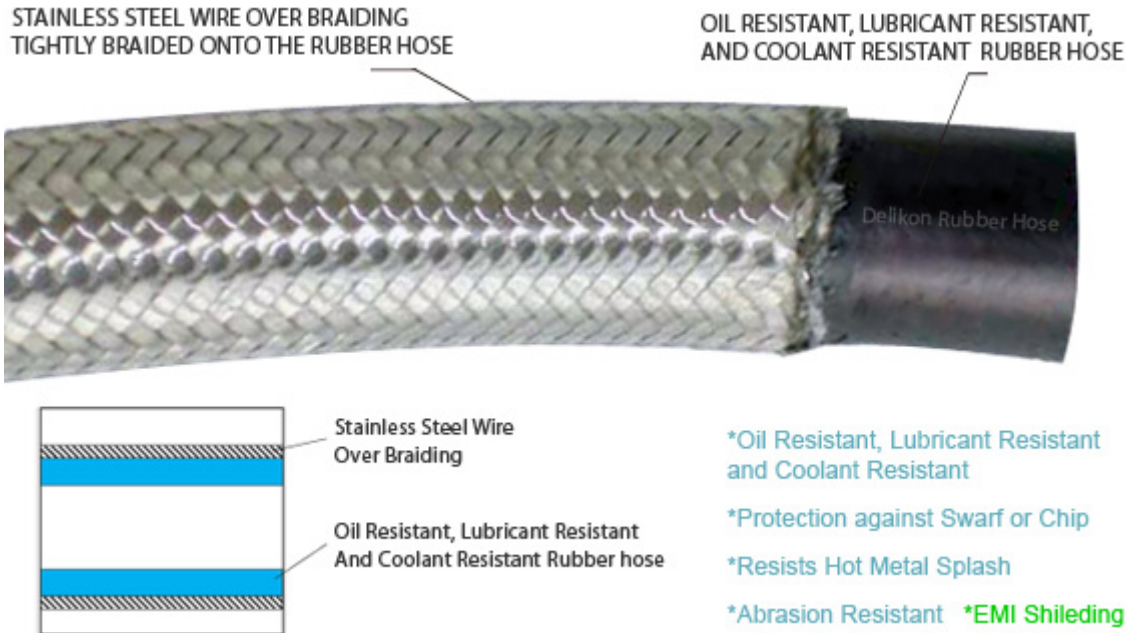

Delikon Oil Resistant Over Braided Flexible Conduit and Conduit Fittings protect Servo Feedback Cable, Servo Power Cable, Servo Drive Command Cable, Spindle Feedback Cable, Spindle Power Cable, CRT MDI Cables.

Type	Trade Size	I.D. (mm)		O.D. (mm)		Meter/Coil
		Min.	Max.	Min.	Max.	
WNS-06	6	5.7	6.3	13.5	13.8	100
WNS-08	8	7.7	8.3	15.5	15.8	100
WNS-10	10	9.7	10.3	17.5	17.8	100
WNS-13	13	12.7	13.3	22.5	22.8	50
WNS-16	16	15.7	16.5	25.5	26.8	50
WNS-19	19	18.7	19.5	29.5	29.8	30
WNS-25	25	24.7	25.5	36.5	36.8	20

Type	Trade Size	I.D. (mm)		O.D. (mm)		Meter/Coil
		Min.	Max.	Min.	Max.	
ORC-04	04	5.30	5.90	9.90	10.50	50
ORC-06	06	8.30	8.90	12.30	12.90	50
ORC-08	08	10.90	11.50	15.00	15.60	30
ORC-10	10	13.90	14.50	19.00	19.60	30
ORC-12	12	17.20	17.80	22.60	23.20	20
ORC-16	16	22.10	22.70	27.90	28.50	10



Delikon Oil Resistant Over Braided Flexible Conduit and Fittings system is ideally used in situations where a flexible conduit must withstand exposure to machine tool fluids, oils, dust, etc. The stainless steel over braiding provides abrasion resistance, and protection against Swarf or Chip. The conduit fittings clamp the inner conduit and the braiding tightly, and keep the conduit assembly liquid tight when subject to pressure or machine vibrations. Sizes of this over braided flexible rubber conduit are specially designed for machine tools power or data cables, motor cables and control cables. It could also be used for transferring machine fluids, such as oil, coolant.



Delikon Over Braided Rubber Flexible Conduit
Oil Resistant, Lubricant Resistant and Coolant Resistant

Fittings for Over Braided Rubber Flexible Conduit

These conduit fittings clamp the inner conduit and the braiding tightly, and keep the conduit assembly liquid tight when subject to pressure or machine vibrations.



Straight Aluminum Connector for oil resistant over braided flexible rubber conduit. *Oil resistant, liquid tight.*

Type	Suitable for use with	
WABS-06	WNS-06	ORC-04
WABS-08	WNS-08	ORC-06
WABS-10	WNS-10	ORC-08
WABS-13	WNS-13	ORC-10
WABS-16	WNS-16	ORC-12
WABS-19	WNS-19	ORC-16
WABS-25	WNS-25	-



90 degrees Aluminum Connector for oil resistant over braided flexible rubber conduit. *Oil resistant, liquid tight.*

Type	Suitable for use with	
WALS-06	WNS-06	ORC-04
WALS-08	WNS-08	ORC-06
WALS-10	WNS-10	ORC-08
WALS-13	WNS-13	ORC-10
WALS-16	WNS-16	ORC-12
WALS-19	WNS-19	ORC-16
WALS-25	WNS-25	-