


**Water-tight PVC Coated Flexible Metallic Conduit ( YF-707 )**





*Delikon Metal Forming Technology*

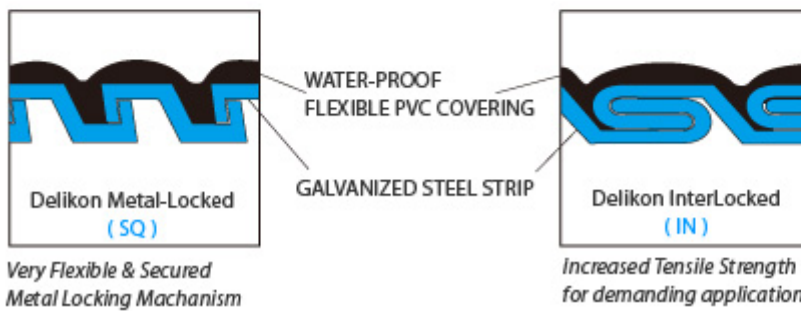

- \*Water-tight
- \*Very flexible
- \*Metal Sheath

Type	Trade Size	I.D. (mm)		O.D. (mm)		Min. Bending Radius (mm)	Meter/Coil
		Min.	Max.	Min.	Max.		
YF-70701-SQ	-	<b>7.8</b>	8.2	<b>11.2</b>	11.6	50	100
YF-70702-SQ	1/4"	<b>9.7</b>	10.2	<b>14.0</b>	14.5	50	100
YF-70703-SQ	3/8"	<b>12.3</b>	12.8	<b>16.7</b>	17.2	50	50
YF-70704-SQ	1/2"	<b>15.7</b>	16.3	<b>20.2</b>	20.7	65	50
YF-70706-SQ	3/4"	<b>20.7</b>	21.2	<b>25.5</b>	26.1	75	50
YF-70710-SQ	1"	<b>26.0</b>	26.6	<b>31.6</b>	32.2	100	50
YF-70712-SQ	1-1/4"	<b>34.7</b>	35.4	<b>40.8</b>	41.5	125	30
YF-70714-SQ	1-1/2"	<b>40.0</b>	40.6	<b>46.6</b>	47.2	150	25
YF-70720-SQ	2"	<b>51.3</b>	51.9	<b>58.1</b>	58.7	175	20
YF-70724-SQ	2-1/2"	<b>62.9</b>	63.6	<b>72.1</b>	73.0	200	10
YF-70730-SQ	3"	<b>77.9</b>	78.7	<b>87.9</b>	88.9	225	10
YF-70740-SQ	4"	<b>101.6</b>	102.6	<b>113.2</b>	114.3	275	10
YF-70750-SQ	5"	<b>125.0</b>	127.0	<b>137.0</b>	139.5	300	5
YF-70760-SQ	6"	<b>150.0</b>	153.0	<b>162.0</b>	165.0	400	5



		<b>INTERLOCKED (IN)</b> (HIGHER TENSILE STRENGTH)					
Type	Trade Size	I.D. (mm)		O.D. (mm)		Min. Bending Radius (mm)	Meter/Coil
		Min.	Max.	Min.	Max.		
YF-70701-IN	-	<b>7.8</b>	8.2	<b>11.2</b>	11.6	50	100
YF-70702-IN	1/4"	<b>9.7</b>	10.2	<b>14.0</b>	14.5	50	100
YF-70703-IN	3/8"	<b>12.3</b>	12.8	<b>16.7</b>	17.2	50	50
YF-70704-IN	1/2"	<b>15.7</b>	16.3	<b>20.2</b>	20.7	65	50
YF-70706-IN	3/4"	<b>20.7</b>	21.2	<b>25.5</b>	26.1	75	50
YF-70710-IN	1"	<b>26.0</b>	26.6	<b>31.6</b>	32.2	100	50
YF-70712-IN	1-1/4"	<b>34.7</b>	35.4	<b>40.8</b>	41.5	125	30
YF-70714-IN	1-1/2"	<b>40.0</b>	40.6	<b>46.6</b>	47.2	150	25
YF-70720-IN	2"	<b>51.3</b>	51.9	<b>58.1</b>	58.7	175	20
YF-70724-IN	2-1/2"	<b>62.9</b>	63.6	<b>72.1</b>	73.0	200	10
YF-70730-IN	3"	<b>77.9</b>	78.7	<b>87.9</b>	88.9	225	10
YF-70740-IN	4"	<b>101.6</b>	102.6	<b>113.2</b>	114.3	275	10
YF-70750-IN	5"	<b>125.0</b>	127.0	<b>137.0</b>	139.5	300	5
YF-70760-IN	6"	<b>150.0</b>	153.0	<b>162.0</b>	165.0	400	5

*A unique Delikon vacuum coating process allows a flexible metallic conduit to have a flexible PVC jacket which does not restrict the excellent flexibility characteristics of the inner metal core. The PVC jacket is resistant to water and most types of oils and greases. This flexible conduit is extremely flexible as well as offering satisfactory levels of mechanical resistance.*